


**INSTALLATION DETAILS**  
**ELF6375DFL LOUVER**  
**UL LISTED & FLORIDA PRODUCT APPROVED**

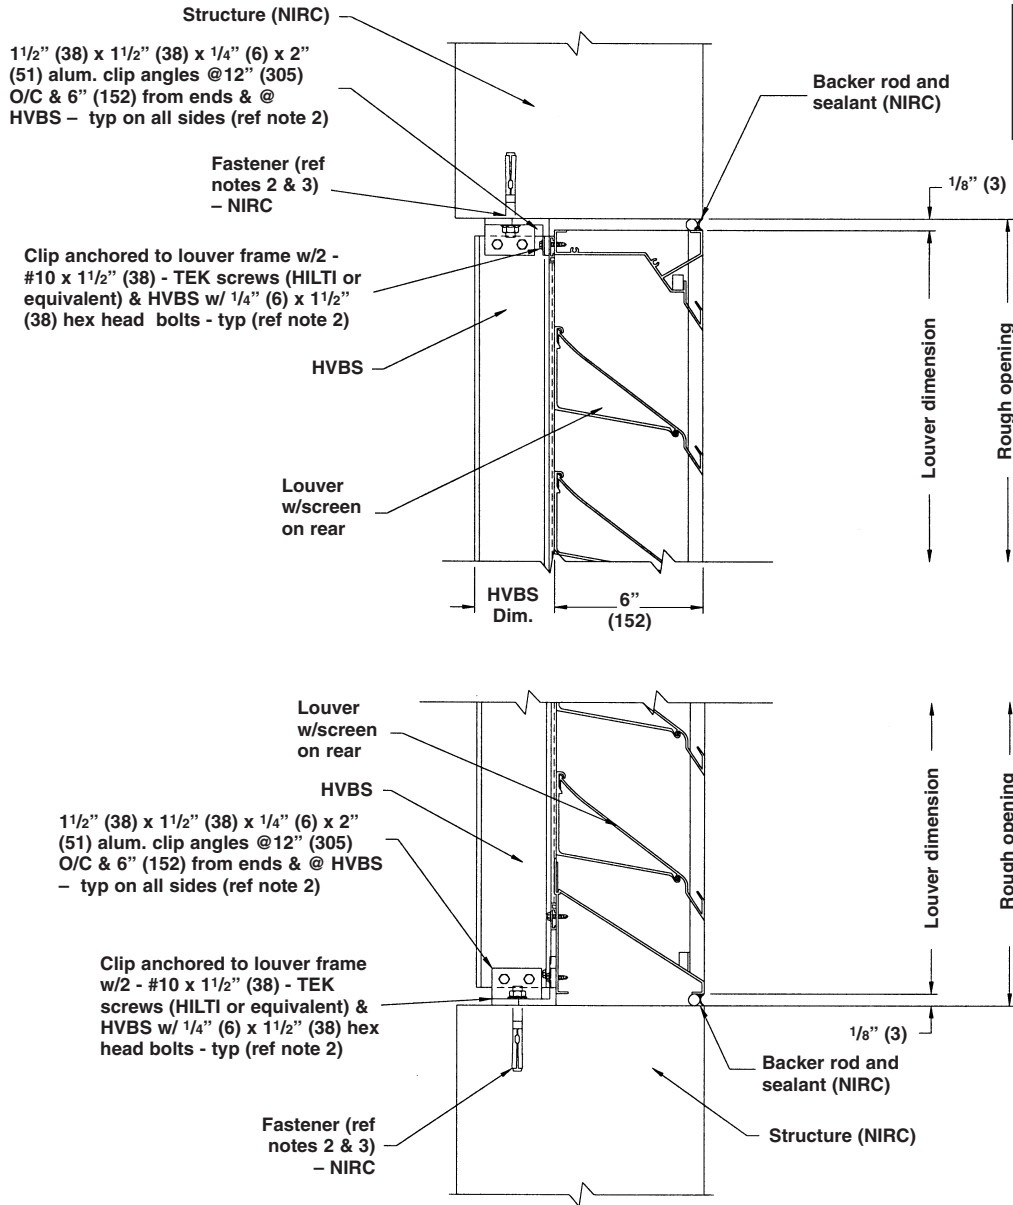

Dimensions shown in parentheses ( ) indicate millimeters.

**ELF6375DFL LOUVER INSTALLATION DETAIL**

**JAMB SIMILAR**

**NOTES:**

1. The installation shown herein must be followed strictly to ensure compliance with UL and Florida listings.
2. Aluminum clip angles & #10 TEK screws are available from Ruskin at additional cost. Anchors for connection to structure are not provided by Ruskin.
3. One anchor into the substrate is required at every clip angle (both frame and HVBS clips). Anchor must be at least 5/16" in diameter.

4. Ruskin is not responsible for determining the suitability of the structure.
5. Shims may be required to achieve consistent clearance between louver and opening on all sides. Shims not provided by Ruskin.
6. HVBS = Hidden Vertical Blade Support.
7. NIRC = Not in Ruskin's Contract.