

AMS AIR MEASURING STATION

The complete AMS unit is factory assembled and tested to provide accurate setpoint monitoring at all times. The unit comes standard with a honeycomb airflow straightener, pressure sensing station and a high performance glass-on-silicone pressure transducer. The sensing blades are extruded aluminum with a clear anodize finish. The pressure transducer output signal is field selectable and can be routed to a building automation system for continuous monitoring of the flow. With a simple jumper setting you may choose either a 0 to 5 vdc or 0 to 10 vdc output signal. The output signal is proportional to cfm.

STANDARD CONSTRUCTION

SLEEVE

9" (229) long x 16 ga. galv. G60 (for slip-fit duct connection).

AIR FLOW STRAIGHTENER

1/2" (13) Honeycomb Cell x 3" (76) 3000 series aluminum alloy.

SENSOR BLADE

6063T5 extruded aluminum, clear anodize finish.

SENSOR PORT FITTINGS

Brass.

PRESSURE TRANSDUCER:

RU-274-R2-VDC, 0-5 or 0-10 VDC output (field selectable).

Output signal is proportional to CFM.

ACCURACY

3% deviation average across measurement range.

POWER REQUIREMENTS

12-40 VDC or 12-35 VAC.

MINIMUM SIZE

Single-6"w x 6"h (152 x 152).

MAXIMUM SIZE

Single section - 60"w x 72"h (1524 x 1829).

Multiple section assembly - 120"w x 72"h (3048 x 1829).

VELOCITY

Product Range - 300 to 5000 FPM.

Operating Range - 300 to 2,000 FPM.

Standard units with RU274-R2-VDC.

Operating Range - 300 to 5,000 FPM.

Units with AMS810 high pressure transducer.

OPERATING TEMPERATURE

-22° F to +140° F standard.

VARIATIONS

The AMS is available with several options to fit your specific application.


- Flanged connection
- AMS810 (4-20mA transducer)
- AMS810 High pressure transducer (units over 2,000 FPM)

NOTES:

1. Dimensions shown in parenthesis () indicate millimeters.
2. Refer to installation manual for additional details.



Ruskin Company certifies that the AMS Air Monitoring Station shown herein is licensed to bear the AMCA Certified Rating Seal - Airflow Measuring Station Performance. The ratings shown are based on tests and procedures performed in accordance with AMCA publication 611 and comply with requirements of the AMCA Certified Ratings Program. The AMCA Certified Ratings Seal applies to airflow measurement performance only.

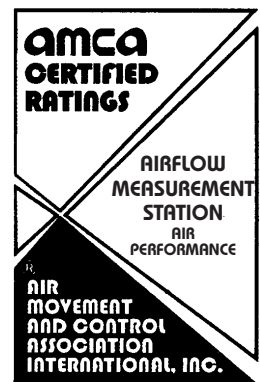

AIR PERFORMANCE


TEST RUN	TEST SET UP FIG 1				
	PAMS in W.G.	Reference Volume CFM	Reference Velocity FPM	Indicated Volume CFM	% Accuracy to Reference Airflow
AIR PERFORMANCE SIZE 12 x 12 (305 x 305)					
1	0.009	260	260	256.96	-1.17
2	0.023	397	397	408.85	2.98
3	0.151	1,026	1,026	1037.77	1.15
4	0.600	2,053	2,053	2054.44	0.07
5	1.800	3,551	3,551	3538.89	-0.34
6	3.760	5,116	5,116	5095.96	-0.39
AIR PERFORMANCE SIZE 24 x 24 (610 x 610)					
1	0.020	1,583	396	1609.47	1.67
2	0.070	2,998	750	3003.51	0.18
3	0.125	3,895	974	4008.96	2.93
4	0.495	7,925	1,981	7955.81	0.39
5	1.525	13,894	3,474	13932.83	0.28
6	3.250	20,042	5,011	20309.01	1.33
AIR PERFORMANCE SIZE 36 x 36 (914 x 914)					
1	0.009	2,318	258	2343.60	1.10
2	0.022	3,669	408	3737.59	1.87
3	0.111	8,893	988	8702.54	-2.14
4	0.430	18,463	2,051	17651.25	-4.40
5	1.280	31,160	3,462	31200.63	0.13
6	2.830	45,561	5,062	47217.30	3.64

AIRFLOW RESISTANCE


AMCA Δ Pd test data		
TEST SIZE	VELOCITY	Δ Pd
12" x 12" (305 x 305)	261	0.000
	398	0.011
	1030	0.041
	2073	0.425
	3577	1.385
	5134	2.845
TEST SIZE	VELOCITY	Δ Pd
24" x 24" (610 x 610)	396	0.010
	750	0.025
	974	0.040
	1981	0.135
	3474	0.360
	5011	0.730
TEST SIZE	VELOCITY	Δ Pd
36" x 36" (914 x 914)	258	0.000
	408	0.003
	988	0.094
	2051	0.069
	3455	0.145
	5036	0.351

CFM = (K) (PAMS ^M)		
SIZE	K	M
12 x 12	2645.5	0.495
24 x 24	11292	0.498
36 x 36	27427	0.5222


Ruskin Company certifies that the AMS Air Monitoring Station shown herein is licensed to bear the AMCA Certified Rating Seal - Airflow Measuring Station Performance. The ratings shown are based on tests and procedures performed in accordance with AMCA publication 611 and comply with requirements of the AMCA Certified Ratings Program. The AMCA Certified Ratings Seal applies to airflow measurement performance only.

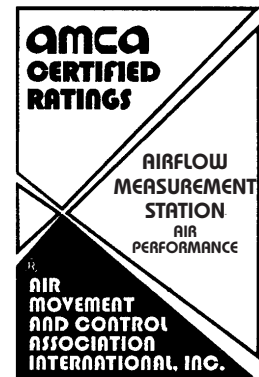


AMS SENSING BLADE DETAIL

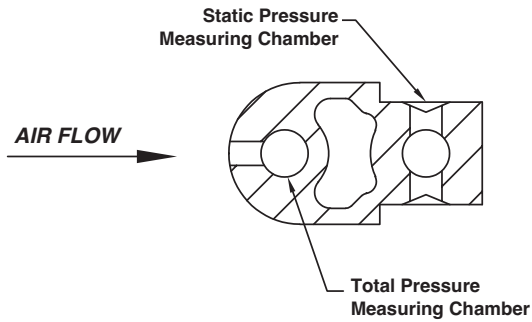


MOUNTING FLANGE OPTIONS




FRONT FLANGE
(Code F)



REAR FLANGE
(Code R)




DOUBLE (FRONT & REAR) FLANGE
(Code D)



OFFSET FLANGE
**Specify Dimensions*
(Code O)

SPECIFICATION

Furnish and install, at locations shown on plans or as in accordance with schedules, an air measuring station with integral pressure transducer. The complete air measuring package shall be factory assembled into one turnkey product and factory commissioned for the specific job requirements. Unit shall have a measuring range from 300 to 5,000 feet per minute. The Air measuring station shall consist of 1/2" x 3" (13 x 76) 3000 series aluminum alloy honeycomb, 6063T5 extruded aluminum sensing blades with anodized finish and a glass-on-silicone GL-Si capacitance sensor pressure transducer capable of measuring up to six field selectable pressure ranges up to 1" water column. The transducer shall be accurate to $\pm 1\%$ of full scale and be contained in a NEMA 4 (IP-65) painted steel enclosure. Transducer shall be factory mounted and piped to high and low brass pressure fittings from the sensor averaging ports. All sensor tubing shall terminate in solid brass barbed fittings. Tubing and associated fittings to be contained in a formed steel protective tubing shield to protect pressure station during transit and installation. The Air Measuring Station shall be licensed to bear the AMCA Certified Ratings Seal for Air Flow Measurement Stations. Air Measuring Stations shall be, in all respects, equivalent to Ruskin Model AMS.

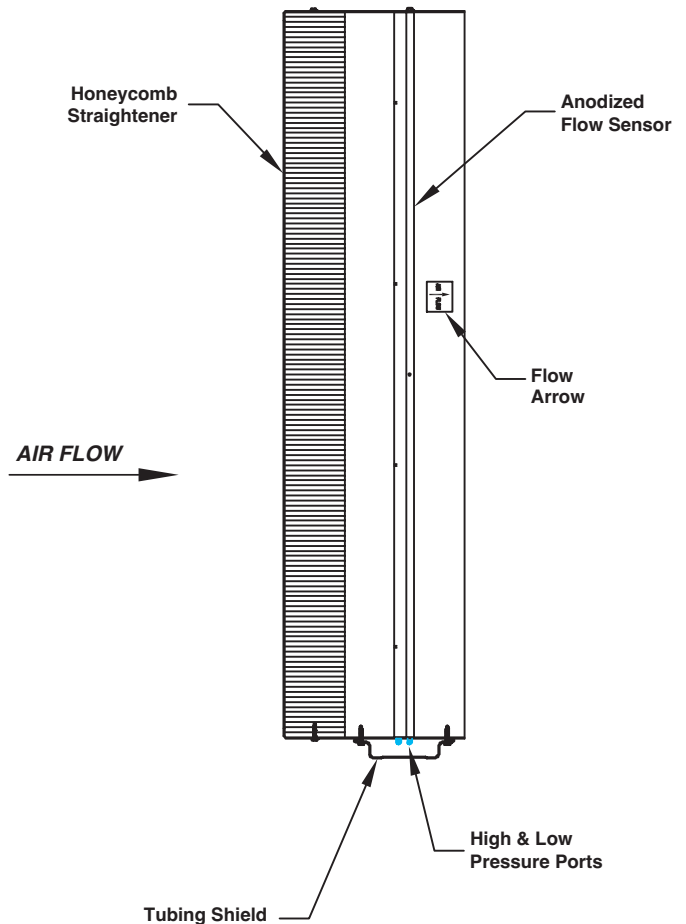

RUSKIN[®]

3900 Dr. Greaves Rd.
Kansas City, MO 64030
(816) 761-7476
FAX (816) 765-8955
www.ruskin.com

Printed on recycled paper
using vegetable based inks 