


IAQ/AMS CONTROL TRANSFORMER SPECIFICATIONS FOR USE WITH ALL IAQ & AMS MODEL CONTROL PACKAGES

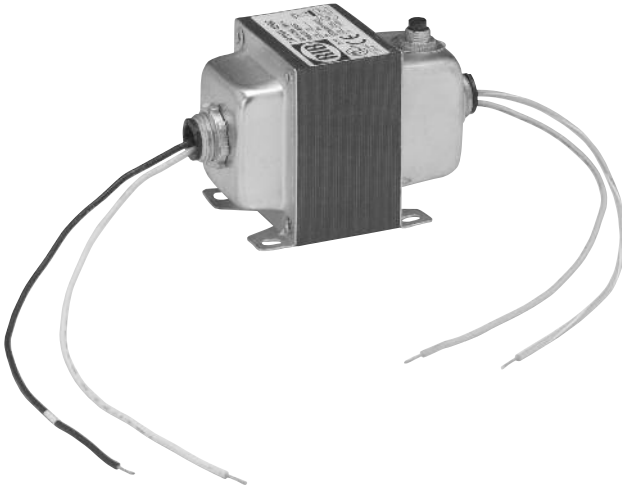

Model IAQ080
Used in IAQ series units

TRANSFORMER DESCRIPTION

Foot-mount, Single Phase, Open Construction.

PRIMARY INPUT VOLTAGE

120 Vac, 50/60 Hz.

SECONDARY OUTPUT VOLTAGE

24 Vac.

POWER RATING

100 VA.

CONNECTIONS

24 Vac Leads - Factory wired to control panel.
Line voltage leads Factory wired to terminal strip.
Ground wire terminated at electrical enclosure.

MANUFACTURED BY

Functional Devices, Inc.

AGENCY FILE NUMBER

UL1585, C-UL, CE E197146



MODEL AMS080
Used in AMS070V controller

TRANSFORMER DESCRIPTION

Foot-mount, Single Phase, Open Construction.

PRIMARY INPUT VOLTAGE

120/208/240 Vac, 60 Hz.

SECONDARY OUTPUT VOLTAGE

24 Vac.

POWER RATING

40 VA.

CONNECTIONS

24 Vac Leads - Factory wired to control panel.
Line voltage leads Factory wired to terminal strip.
Ground wire terminated at electrical enclosure.

MANUFACTURED BY

White-Rodgers.

AGENCY FILE NUMBER

UL1585 (90T40F3).

RUSKIN[®]

3900 Dr. Greaves Rd.
Kansas City, MO 64030
(816) 761-7476
FAX (816) 765-8955
www.ruskin.com