

MODEL PHM MITERED CORNER PENTHOUSES

STANDARD CONSTRUCTION

LOUVERS

Available with models L811(S), L6811(S) and most ELF louver models. Not available with ET125, ELF15S and adjustable and drainable models. See appropriate louver specification sheet for louver construction details.

ROOF

18 gage (1.2) galvanized steel with steel louver models. .063" (1.6) aluminum with aluminum louver models.

STRUCTURAL SUPPORT

20 gage (1.1) galvanized formed steel or 1 1/2" x 4" x 1 1/2" (38 x 102 x 38) 6063T5 extruded aluminum.

CORNERS



Mitered.

SCREEN

1/2" mesh 19 gage (13 x 1.1) galvanized steel with steel louver models. 3/4" x .051" (19 x 1) expanded flattened aluminum bird screen with aluminum louver models.

FINISH


Mill.

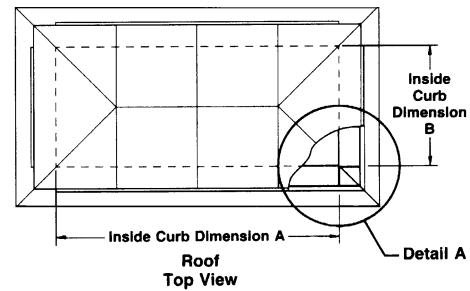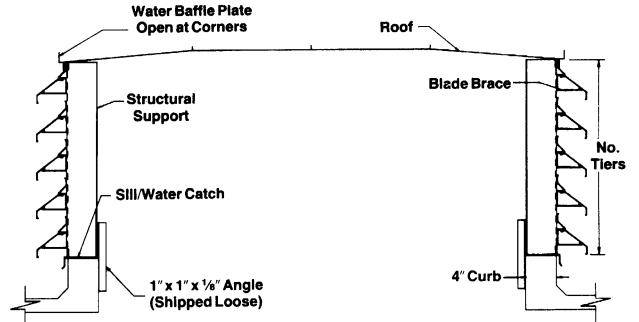

VARIATIONS

(At additional cost)

- Bitumastic roof undercoating.
- 1" (25) fiberglass roof insulation.
- A variety of finishes (baked enamel [modified fluoropolymer], Kynar, anodize, epoxy, flurodize)
- A selection of bird and insect screens.



Dimensions in parenthesis () indicate millimeters.

QTY.	DIMENSIONS			BLADE STYLE (MODEL)	VARIATIONS
	A	B	C		
PROJECT ARCH./ENGR. REPRESENTATIVE			LOCATION CONTRACTOR DATE		