

## MODEL PHM MITERED CORNER PENTHOUSES

### STANDARD CONSTRUCTION

#### LOUVERS

Available with models L811(S), L6811(S) and most ELF louver models. Not available with ET125, ELF15S and adjustable and drainable models. See appropriate louver specification sheet for louver construction details.

#### ROOF

18 gage (1.2) galvanized steel with steel louver models. .063" (1.6) aluminum with aluminum louver models.

#### STRUCTURAL SUPPORT

20 gage (1.1) galvanized formed steel or 1 1/2" x 4" x 1 1/2" (38 x 102 x 38) 6063T5 extruded aluminum.

#### CORNERS



Mitered.

#### SCREEN

1/2" mesh 19 gage (13 x 1.1) galvanized steel with steel louver models. 3/4" x .051" (19 x 1) expanded flattened aluminum bird screen with aluminum louver models.

#### FINISH


Mill.

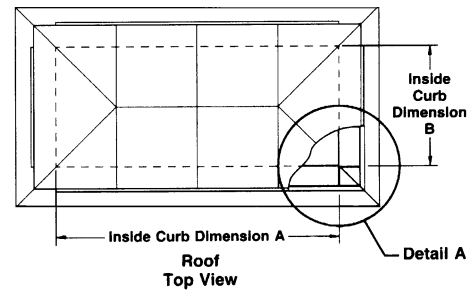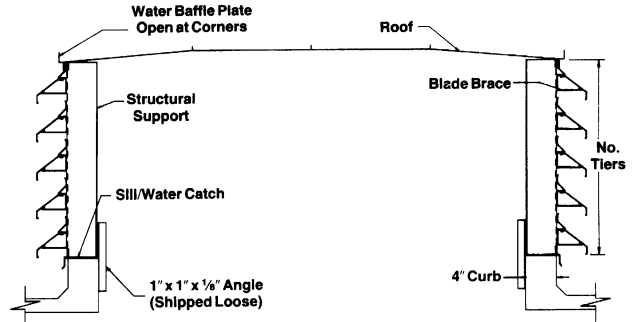

### VARIATIONS

(At additional cost)

- Bitumastic roof undercoating.
- 1" (25) fiberglass roof insulation.
- A variety of finishes (baked enamel [modified fluoropolymer], Kynar, anodize, epoxy, flurodize)
- A selection of bird and insect screens.



Dimensions in parenthesis ( ) indicate millimeters.

QTY.	DIMENSIONS			BLADE STYLE (MODEL)	VARIATIONS
	A	B	C		
PROJECT ARCH./ENGR. REPRESENTATIVE			LOCATION CONTRACTOR DATE		