



SIGHT PROOF LOUVERS




KING
ENTER
CLEARANCE 9'-6"

globe.com/pel17
CARLES
PARK 17
1.877.888.1500

SIGHT PROOF LOUVERS

SIGHT PROOF LOUVERS

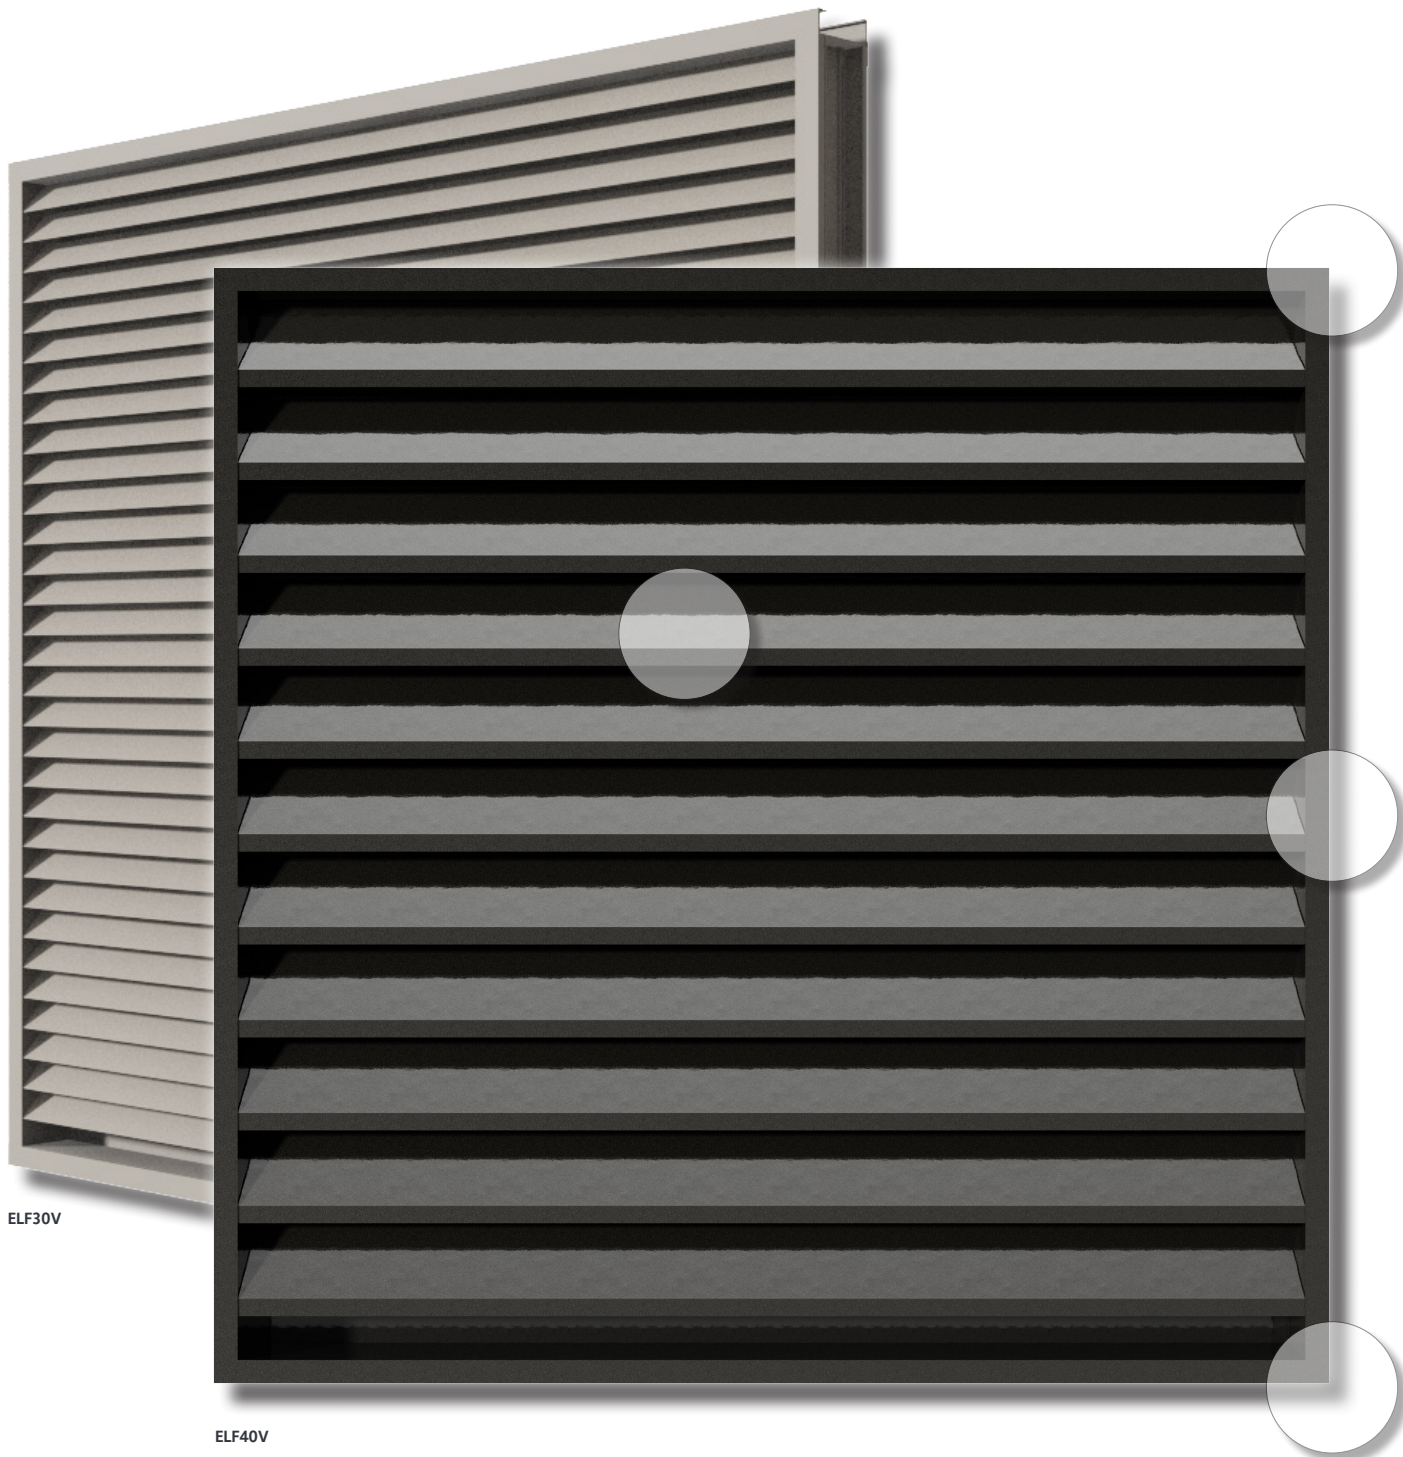


ELF30V

ELF40V


COMPONENT DETAILS




HEAD



BLADE



JAMB

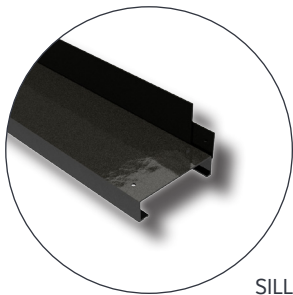

SILL



3900 Dr. Greaves Rd. Kansas City, MO 64030 • (816) 761-7476 • F: (816) 765-8955 • ruskin@ruskin.com • www.ruskin.com

SIGHT PROOF LOUVERS




- 60° BLADE ANGLE
- 2" FRAME DEPTH
- 28% FREE AREA
- SIGHT PROOF
- INVERTED CHEVRON



ELF22V

STATIONARY LOUVER

The ELF22V is a 2" deep stationary louver which has a 60° blade angle that is primarily used for decorative and PTAC applications where water penetration is not a concern.



- 60° BLADE ANGLE
- 4" FRAME DEPTH
- 35% FREE AREA
- SIGHT PROOF
- ARCHITECTURALLY STYLED



ELF40V

STATIONARY LOUVER

The ELF40V Stationary Louver has a 4" deep frame, sight proof blades, 35% free area, and is architecturally styled with hidden mullions to offer a continuous line appearance.



- ECONOMICAL
- 5" FRAME DEPTH
- 48% FREE AREA
- SIGHT PROOF
- REDUCED WATER PENETRATION



ELF520DD

SIGHT PROOF DRAINABLE LOUVER

The ELF520DD Sight Proof Drainable Louver has a 5" deep frame, 48% free area, and reduced water penetration in an economical sight proof design.



- SIGHT PROOF
- 4" FRAME DEPTH
- 42% FREE AREA
- ECONOMICAL
- VANDAL RESISTANT BLADES



L24

STATIONARY LOUVER

The L24 Stationary Louver has a 4" deep frame, 42% free area, and an economical galvanized steel construction.



- SIGHT PROOF
- 6" FRAME DEPTH
- 47% FREE AREA
- ECONOMICAL
- GALVANIZED STEEL CONSTRUCTION



L26

STATIONARY LOUVER

The L26 Stationary Louver has a 6" deep frame, 47% free area, vandal resistant sight proof blades, and an economical steel construction.

SIGHT PROOF LOUVERS

Sight proof louvers offer the same benefits that screens do in concealing equipment. These louvers are built out of aluminum and steel and can be utilized for visual screening and light security. The orientation of sight proof louvers can be positioned both horizontally and vertically.



MODEL	MIN. DIM.	MAX. DIM.	DEPTH	BLADE ANGLE	BLADE STYLE	BLADE ORIENTATION	FREE AREA
ELF22V	8" x 8"	UNLIMITED	2"	45°	CHEVRON	HORIZONTAL	28%
ELF40V	12" x 12"	UNLIMITED	4"	45°	CHEVRON	HORIZONTAL	35%
ELF520DD	12" x 12"	UNLIMITED	5"	20°	SINUSOIDAL	HORIZONTAL	48%
L24	12" x 12"	UNLIMITED	4"	45°	CHEVRON	HORIZONTAL	42%
L26	12" x 12"	UNLIMITED	6"	45°	CHEVRON	HORIZONTAL	47%


*For the most current catalog information please visit www.ruskin.com, or use the Ruskin® Online Louver Selection Tool.

RUSKIN® LOUVER COLORS



*We can match any color!

LOUVER SHAPES

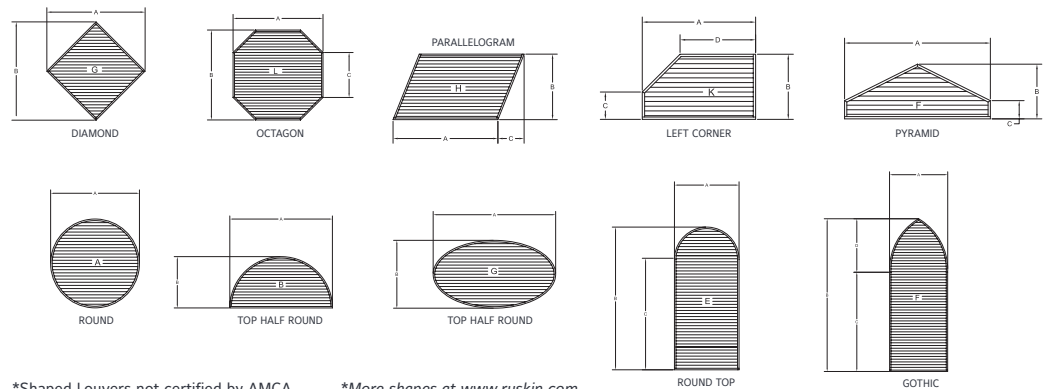

*Shaped Louvers not certified by AMCA

*More shapes at www.ruskin.com