
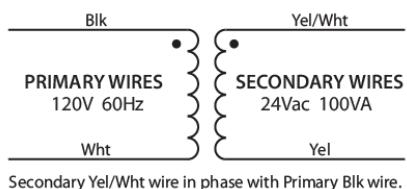


POWER TRANSFORMER SPECIFICATIONS

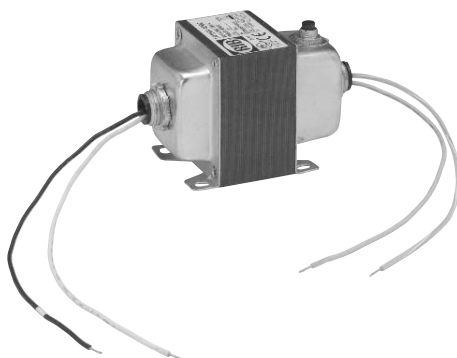

Model IAQ080

TRANSFORMER DESCRIPTION

Foot-mount, Single Phase, Open Construction.

PRIMARY INPUT VOLTAGE

120 Vac, 50/60 Hz.

SECONDARY OUTPUT VOLTAGE

24 Vac.

POWER RATING

100 VA.

DIMENSIONS

4.077" x 2.504" x 3.023" (w/ .500 NPT Hubs)

OPERATING TEMPERATURE



-30 to 140 degF

MANUFACTURED BY

Functional Devices, Inc.

AGENCY APPROVALS

Class 2 UL5085-3 Listed, C-UL, CE, RoHS

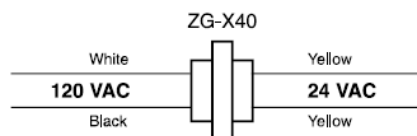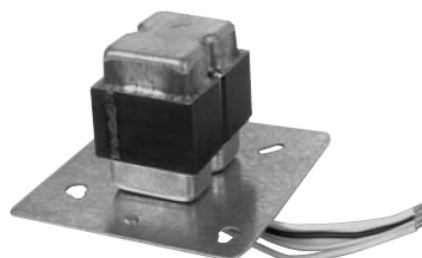

MODEL ZG-X40

TRANSFORMER DESCRIPTION

Foot-mount, Single Phase, Open Construction.

PRIMARY INPUT VOLTAGE

120 Vac, 50/60 Hz.

SECONDARY OUTPUT VOLTAGE

24 Vac.

POWER RATING

40 VA.

DIMENSIONS

4.25" x 4.25" x 2.75" (square outlet box cover)

CONNECTIONS

6.5" leads with stripped ends

MANUFACTURED BY

Basler Electric Company

AGENCY APPROVALS

Class 2 UL1585, CSA 22.2 #66



3900 Dr. Greaves Rd.
Kansas City, MO 64030
(816) 761-7476
FAX (816) 765-8955
www.ruskin.com