

L24/L26

Stationary Louvers

Formed Steel




APPLICATION

The L24/L26 are 4"/6" deep stationary louvers with continuous blades. These models have hidden mullions combined with durability and economy of steel construction. Appearance is similar to extruded aluminum models.

STANDARD CONSTRUCTION

Frame	L24 - 4" (102) deep, 20 gage (.9) galvanized steel L24 - 6" (152) deep, 20 gage (.9) galvanized steel
Blades	L24 - 20 gage (.9) galvanized steel chevron style blades on approximately 2 1/2" (64) centers. L26 - 20 gage (.9) galvanized steel chevron style blades on approximately 3 1/2" (89) centers.
Screen	1/2" (13) mesh x 19 gage (1.1) screen in removable frame. Screen adds approximately 1/2" (13) to louver depth.
Finish	Mill
Minimum Size	12"w x 12"h (305 x 305)
Approximate Shipping Weight	12 lbs. per sq. ft. (59 kg/m ²)
Maximum Factory Assembly Size	60"w x 72"h (1524 x 1829) Louvers larger than the maximum factory assembly size will require field assembly of smaller sections.

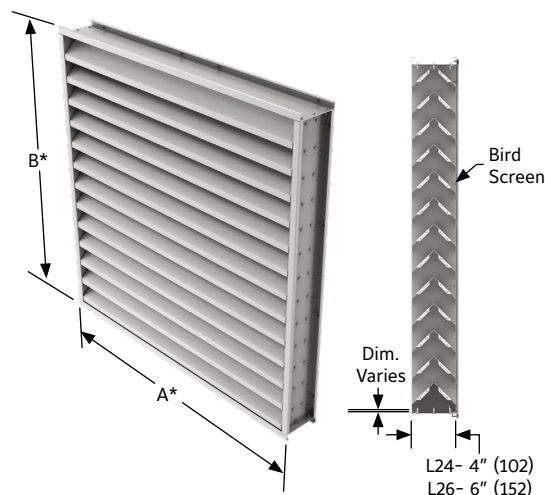

5
YEAR LIMITED
WARRANTY

ISO9001
CERTIFIED

FEATURES

- ▶ Sightproof and vandal resistant blades
- ▶ Economical galvanized steel construction
- ▶ Approximate free area for a 48"w (1219) unit: 42% for L24; 47% for L26

VARIATIONS


Variations to the basic design of these louvers are available at additional cost. They include:

- ▶ Extended sill
 - ▶ Hinged frame
 - ▶ Front or rear security bars
 - ▶ Filter racks
 - ▶ A variety of bird and insect screens
 - ▶ Optional finishes available at additional cost.
- Please see [Paint Finishes and Color Guide](#) and [Finish Type Model Chart](#) for more details. Contact louversales@ruskin.com with questions

- ▶ Heavier 18 gage (1.2) and 16 gage (1.5) construction

Consult Ruskin for other special requirements.






FRAME CONSTRUCTION

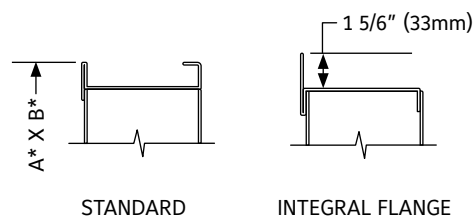

NOTES:

- Dimensions in inches, parenthesis () indicate millimeters.
- Units can be furnished actual size or with size deducts.

TYPICAL INSTALLATION DETAILS

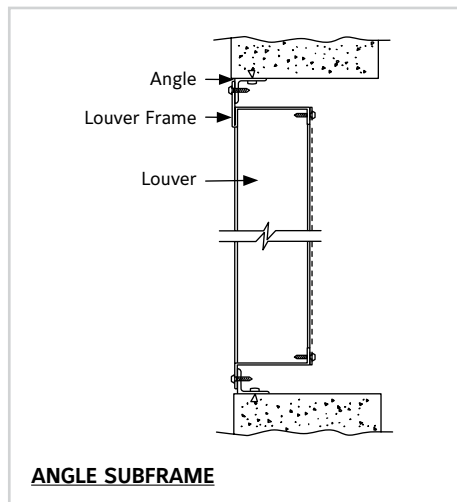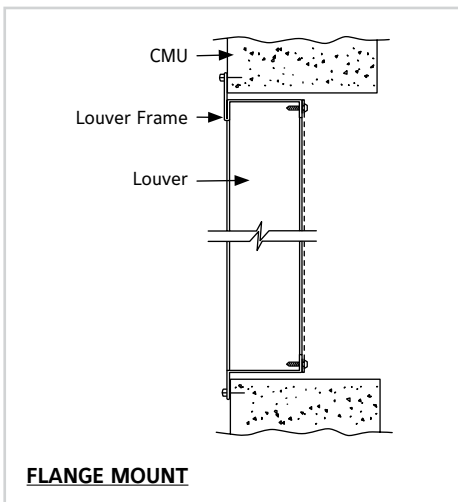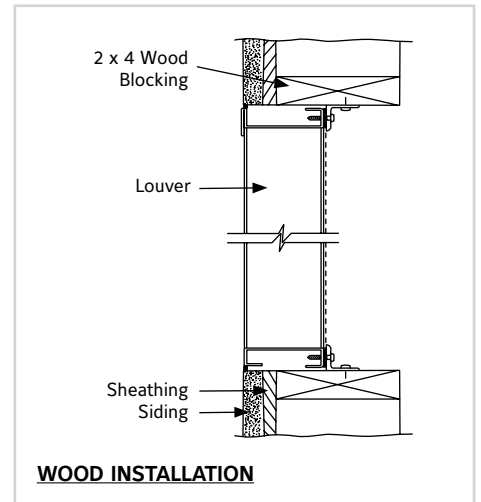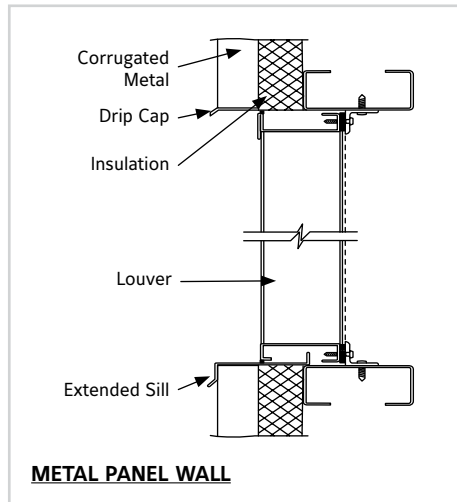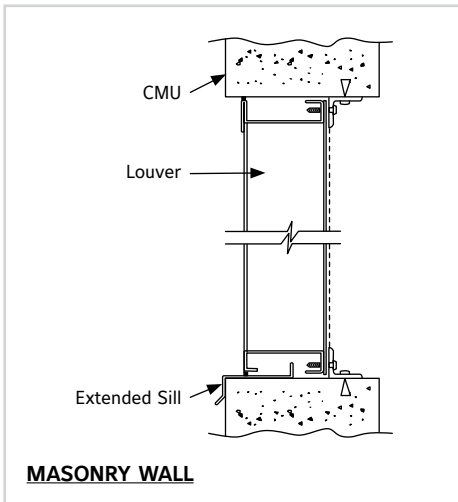

SUGGESTED SPECIFICATION

Furnish and install louvers as hereinafter specified where shown on plans or as described in schedules. Louvers shall be stationary type entirely contained within a 4" (102) or 6" (152) frame. Louver components (heads, jambs, sills, blades & mullions) shall be factory assembled by the louver manufacturer. Louver sizes too large for shipping shall be built up by the contractor from factory assembled louver sections to provide overall sizes required. Louver design shall limit span between visible mullions to 6 feet (2m) and shall incorporate structural supports required to withstand a wind load of 30 lbs. per sq. ft. (1.44kPa) (equivalent of a 110 mph [177 KPH] wind - specifier may substitute any loading required).

Louvers shall be Ruskin Model L24 or L26 construction as follows:

- Frame: 20 gage (.9) galvanized steel.
- Blades: 20 gage (.9) galvanized steel chevron style on approximately 2 1/2" (64) (L24) or 3 1/2" (89) (L26) centers.
- Screen: 1/2" (13) mesh x 19 gage (1.1) galvanized steel.
- Finish: Select finish specification from Ruskin Finishes Brochure.

i LINKS TO IMPORTANT DOCUMENTS

Document Title
Paint Finishes and Color Guide
Limited Warranty Document



3900 Doctor Greaves Road
Grandview, MO 64030
Website: www.ruskin.com
Phone: (816) 761-7476