

## CDR82 HEAVY DUTY ROUND CONTROL DAMPER

### STANDARD CONSTRUCTION

#### FRAME

Steel channel. See table below for web dimension and thickness.

#### BLADE

Steel, stiffened as required. See table below for blade thickness.

#### AXLE

Continuous, plated steel axle; angle reinforced as required. See table below for axle diameter.

#### CONTROL SHAFT

Axle extends 6" (152) beyond frame.

#### BEARINGS

Stainless steel sleeve pressed into frame.

#### BLADE STOP

1/2" (13) x 1/4" (6) steel bar.

#### FINISH

Aluminum paint with some parts mill galvanized.

#### MINIMUM SIZE

4" (102) diameter.


#### MAXIMUM SIZE

60" (1524) diameter.



#### MAXIMUM TEMPERATURE

250°F (121°C) is standard. Dampers can be supplied for 250°F to 400°F (121°C to 204°C) temperature conditions by increasing clearance between blade and frame. Advise maximum operating temperature. Contact Ruskin for applications above 400°F (204°C).


Dimensions in parenthesis ( ) indicate millimeters.

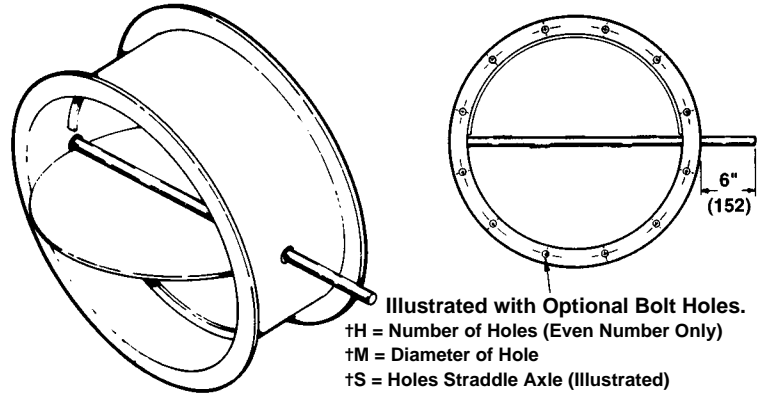

Illustrated with Optional Bolt Holes.  
 †H = Number of Holes (Even Number Only)  
 †M = Diameter of Hole  
 †S = Holes Straddle Axle (Illustrated)  
 †T = Holes Parallel with Axle Q (Not Illustrated)

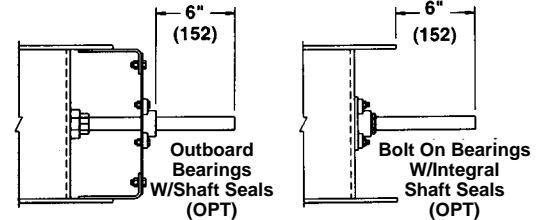

### TYPICAL MANUAL ACTUATOR MOUNTING\*

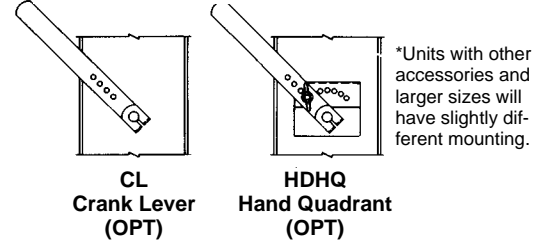

### VARIATIONS

Additional variations to those listed in table are available. Contact Ruskin for pricing.

- Higher Temperature Construction
- Special Finishes

**NOTE:** For severe applications, use Ruskin Model CDR92

Inside Diameter (D)		Frame		Blade Thickness	Axle Diameter
Above	Through	Flange (F)	Web (C)		
4" (102)	7 3/4" (197)	1 1/4" x 10 ga.	6" x 10 ga.	10 ga.	1/2" (13)
7 3/4" (197)	11 3/4" (299)	1 1/4" x 10 ga.	8" x 10 ga.	10 ga.	1/2" (13)
11 3/4" (299)	14" (356)	1 1/2" x 10 ga.	8" x 10 ga.	10 ga.	1/2" (13)
14" (356)	24" (610)	1 1/2" x 1 1/4"	8" x 10 ga.	10 ga.	3/4" (19)
24" (610)	42" (1067)	2" x 1 1/4"	8" x 10 ga.	3/16"	3/4" (19)
42" (1067)	48" (1219)	2" x 1 1/4"	8" x 10 ga.	3/16"	1" (25)
48" (1219)	60" (1524)	2 1/2" x 5/16"	8" x 3/16"	1/4"	1" (25)

FRAME	BLADE	SEALS (Opt)	BEARINGS	AXLE	ACCESSORIES
STEEL CHANNEL - SEE CONSTRUCTION TABLE	STEEL STIFFENED AS REQUIRED - SEE TABLE	NEOPRENE 250°F BLADE SEAL	SLEEVE PRESS INSERT	PLATED CONTINUOUS 6" EXTENSION BEYOND FRAME	BOLT HOLES IN ONE FLANGE (OPT)
304 STN STL (OPT)	304 STN STL (OPT)	SILICONE 400°F BLADE SEAL	BEARINGS BOLTED TO FRAME (OPT)		BOLT HOLES IN BOTH FLANGES (OPT)
			BRGS BOLTED TO FRAME W/SHAFT SEALS (OPT)	304SS (OPT)	MANUAL ACT. (OPT)
			BRGS MTD OUTBOARD W/SHAFT SEALS (OPT)		CL
					ELECTRIC ACTUATOR (OPT)
					PNEUMATIC ACTUATOR (OPT)

QTY.	DIMENSIONS				BOLT HOLE ORIENT.		COMMENTS	TAG	
	D Diameter	G Bolt Circle Diam.	H No. Holes	M Hole Diam.	S Straddle	T Parallel			
JOB CONTRACTOR				LOCATION					

# CDR82 SUGGESTED SPECIFICATION

Furnish and install, at locations shown on plans or in accordance with schedules, heavy duty industrial grade control dampers meeting the following specifications: Dampers shall be butterfly type consisting of circular blade, mounted to axle within formed flanged frame. Frames shall be constructed of steel channel and shall have full circumference blade stop located in airstream. Damper shaft shall be continuous, solid cold rolled steel extending through entire diameter of damper and beyond damper bearing a minimum of 6 inches. Axles shall be supported in stainless steel sleeve bearing pressed into frame. Damper frame and blade shall be fabricated

from hot rolled steel. All parts not otherwise protected shall be given one coat of aluminum paint. Damper leakage shall not exceed (specifier select) 35 total CFM with blade seals (or) 175 total CFM with full circumference blade stop based on 48" diameter unit at 1" W.G. Maximum pressure drop across a 48" diameter damper shall be less than .01" W.G. at 10,000 CFM. Submittal shall include published performance data on a complete range of sizes developed from testing in accordance with AMCA Standard 500 in an AMCA registered laboratory. Damper shall be Ruskin model CDR82.

## CDR82 PERFORMANCE DATA

### DAMPER LEAKAGE

Damper Width	Maximum System Pressure	Maximum System Velocity	Leakage with seals*		Leakage without seals*	
			% of max. flow	Total CFM	% of max. flow	Total CFM
60" (1524)	6.0" w.g.	4000 fpm	.057	45	.286	225
48" (1219)	6.0" w.g.	4000 fpm	.069	35	.348	175
36" (914)	8.0" w.g.	5000 fpm	.079	28	.353	125
24" (610)	8.0" w.g.	6000 fpm	.132	25	.450	85
12" (305)	10.0" w.g.	6000 fpm	.318	15	1.060	50

\*Leakage information based on pressure differential of 1" w.g.

### LEAKAGE CORRECTION FACTOR

Static Pressure (in. w.g.)	1	2	3	4	5	6	7	8	9	10
Correction Factor	1.0	1.4	1.7	2.0	2.2	2.4	2.6	2.8	3	3.2


### DETERMINING LEAKAGE

To determine leakage at static pressure differentials higher than one inch water gage, multiply leakage at one inch (determined from table) by correction factor for higher static pressure (determined from the Leakage Correction Factor Table).

Leakage ratings are based on AMCA Standard 500 using Test Setup Apparatus Figure 5.5. Torque applied holding damper closed at 10 in. lbs. per sq. ft. of damper with minimum of 20 in. lbs.

Dampers may tolerate higher pressures and velocities than those listed here. Conservative ratings are presented intentionally in an effort to avoid misapplication. Consult Ruskin or your Ruskin representative when damper is to be applied in conditions exceeding recommended maximums.

### DAMPER PRESSURE DROP

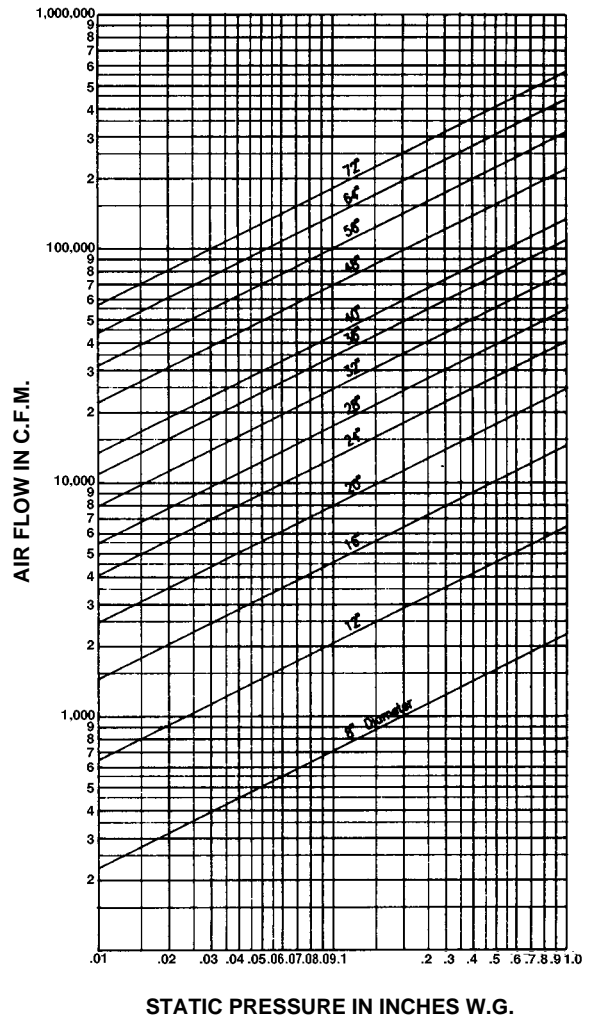

Performance curves based on AMCA Standard 500 using test setup apparatus figure 5.3 (damper installed with duct upstream and downstream). Static pressure and CFM are corrected to .075 lb/cu ft air density.



3900 Dr. Greaves Rd.  
 Kansas City, MO 64030  
 (816) 761-7476  
 FAX (816) 765-8955  
 www.ruskin.com