


## IAQ/AMS CONTROL TRANSFORMER SPECIFICATIONS FOR USE WITH ALL IAQ & AMS MODEL CONTROL PACKAGES

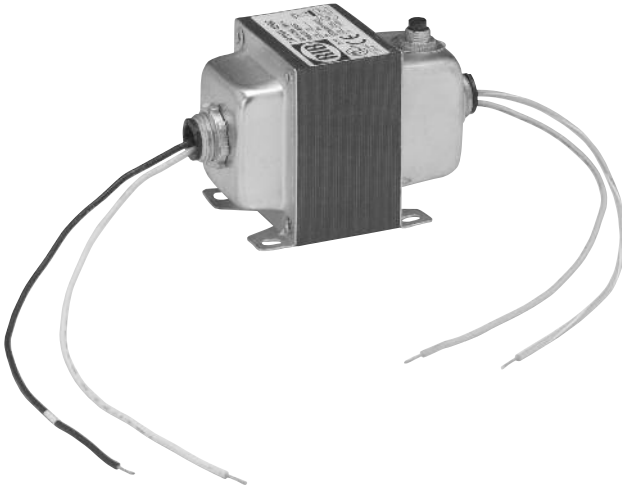

**Model IAQ080**  
Used in IAQ series units

**TRANSFORMER DESCRIPTION**

Foot-mount, Single Phase, Open Construction.

**PRIMARY INPUT VOLTAGE**

120 Vac, 50/60 Hz.

**SECONDARY OUTPUT VOLTAGE**

24 Vac.

**POWER RATING**

100 VA.

**CONNECTIONS**

24 Vac Leads - Factory wired to control panel.  
Line voltage leads Factory wired to terminal strip.  
Ground wire terminated at electrical enclosure.

**MANUFACTURED BY**

Functional Devices, Inc.

**AGENCY FILE NUMBER**

UL1585, C-UL, CE E197146



**MODEL AMS080**  
Used in AMS070V controller

**TRANSFORMER DESCRIPTION**

Foot-mount, Single Phase, Open Construction.

**PRIMARY INPUT VOLTAGE**

120/208/240 Vac, 60 Hz.

**SECONDARY OUTPUT VOLTAGE**

24 Vac.

**POWER RATING**

40 VA.

**CONNECTIONS**

24 Vac Leads - Factory wired to control panel.  
Line voltage leads Factory wired to terminal strip.  
Ground wire terminated at electrical enclosure.

**MANUFACTURED BY**

White-Rodgers.

**AGENCY FILE NUMBER**

UL1585 (90T40F3).

***RUSKIN***<sup>®</sup>

3900 Dr. Greaves Rd.  
Kansas City, MO 64030  
(816) 761-7476  
FAX (816) 765-8955  
[www.ruskin.com](http://www.ruskin.com)