

EME3625DFLMD

Wind-Driven Rain Resistant Stationary Louver

Miami-Dade Approved & AMCA540/550 Certified

Miami Date County, Florida Notice | Acceptance Number: 20-0909.07 (Expires 12/20/2023)




APPLICATION

The EME3625DFLMD is a 3" deep extruded aluminum louver with closely spaced vertical blades that prevent the penetration of wind-driven rain. This louver is designed with exceptional protection against wind-driven rain under severe conditions.

STANDARD CONSTRUCTION

Frame	3" (76) deep, 6063T6 extruded aluminum with .073" (1.9) nominal wall thickness.
Blades	6063T6 extruded aluminum .040" (1) nominal wall thickness. Blades are mounted vertically and spaced approximately 3/4" (19) center to center.
Screen	5/8" x .040 (16 x 1.0) expanded, flattened aluminum screen in removable frame. Screen adds approximately 1/2" (13) to louver depth.
Extended Sill	.080" (2.1) formed aluminum with end dams.
Finish	Mill.
Minimum Size	12"w x 12"h (305 x 305).
Approximate Shipping Weight	5 lbs. per sq. ft. (24 kg/m ²).
Maximum Single Section Size	Shall be 48" x 96" (1219 x 2438). Lifting lugs provided on louvers 48" x 72" (1219 x 1829) and larger. Field Assembly: Unlimited width by 96"h (2438). Multiple section louver will be shipped in single sections and must be joined together in the field by the installer. Section joint splice hardware is provided. Sections may not be stacked in height. Openings taller than the maximum louver height will need to be divided into multiple openings with suitable structural members. Structural members are not designed or provided by Ruskin.

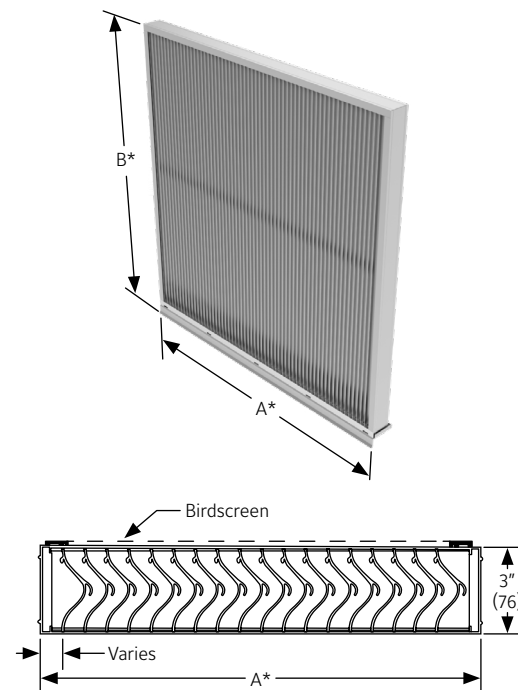

HIGH VELOCITY RAIN RESISTANT WITH BLADES FULLY OPEN AND IMPACT RESISTANT LOUVER Basic Protection Level D
See www.AMCA.org for all certified or listed products.

This label does not signify AMCA airflow performance certification.

INSTALLATION

The EME3625DFLMD must be installed per the appropriate Installation Detail. Reference the appropriate separate Installation Instruction Sheet.

FEATURES

- ▶ 46% Free Area.
- ▶ Miami Dade Approved: 20-0909.07 (Expires 12/20/2023).
- ▶ AMCA 550 Listed Product.
- ▶ AMCA 540 Impact Rated.
- ▶ Closely spaced vertical blades prevent the penetration of wind-driven rain, reducing damage and additional operating expenses.
- ▶ Published performance ratings based on testing in accordance with AMCA Publication 511.
- ▶ Excellent pressure drop performance.
- ▶ Aluminum construction for low maintenance and high resistance to corrosion.
- ▶ All welded construction.
- ▶ Visible mullion construction. Hidden mullions and continuous blade construction are not available.

VARIATIONS

- ▶ Filter racks.
- ▶ A variety of bird and insect screens.
- ▶ Selection of finishes: prime coat, 50% PVDF (modified fluoropolymer), epoxy, Pearledize 50 & 70, 70% PVDF, clear and color anodize. (Some variation in anodize color consistency is possible).

All variations are available at additional cost.

Consult Ruskin for other special requirements.


NOTE: Dimensions in inches, parenthesis () indicate millimeters.

FREE AREA GUIDE

Free Area Guide shows free area in ft² and m² for various sizes of EME3625DFLMD.

		Width – Inches and Meters						
Height – Inches and Meters		12 0.30	18 0.45	24 0.60	30 0.75	36 0.90	42 1.05	48 1.20
	12 0.30	0.22 0.02	0.37 0.03	0.52 0.05	0.67 0.06	0.82 0.08	0.97 0.09	1.12 0.10
	18 0.45	0.43 0.04	0.72 0.07	1.00 0.09	1.29 0.12	1.57 0.15	1.86 0.17	2.15 0.20
	24 0.60	0.64 0.06	1.06 0.10	1.48 0.14	1.91 0.18	2.33 0.22	2.75 0.26	3.18 0.30
	30 0.75	0.84 0.08	1.40 0.13	1.96 0.18	2.52 0.23	3.08 0.29	3.64 0.34	4.20 0.39
	36 0.90	1.05 0.10	1.74 0.16	2.44 0.23	3.14 0.29	3.84 0.36	4.54 0.42	5.23 0.49
	42 1.05	1.25 0.12	2.09 0.19	2.92 0.27	3.76 0.35	4.59 0.43	5.43 0.50	6.26 0.58
	48 1.20	1.46 0.14	2.43 0.23	3.40 0.32	4.38 0.41	5.35 0.50	6.32 0.59	7.29 0.68
	54 1.35	1.66 0.15	2.77 0.26	3.88 0.36	4.99 0.46	6.10 0.57	7.21 0.67	8.32 0.77
	60 1.50	1.87 0.17	3.12 0.29	4.36 0.41	5.61 0.52	6.86 0.64	8.11 0.75	9.35 0.87
	66 1.65	2.08 0.19	3.46 0.32	4.85 0.45	6.23 0.58	7.61 0.71	9.00 0.84	10.38 0.97
	72 1.80	2.28 0.21	3.80 0.35	5.33 0.50	6.85 0.64	8.37 0.78	9.89 0.92	11.41 1.06
	78 1.95	2.49 0.23	4.15 0.39	5.81 0.54	7.47 0.69	9.12 0.85	10.78 1.00	12.44 1.16
	84 2.10	2.69 0.25	4.49 0.42	6.29 0.58	8.08 0.75	9.88 0.92	11.68 1.09	13.47 1.25
	90 2.25	2.90 0.27	4.83 0.45	6.77 0.63	8.70 0.81	10.64 0.99	12.57 1.17	14.50 1.35
	96 2.40	3.11 0.29	5.18 0.48	7.25 0.67	9.32 0.87	11.39 1.06	13.46 1.25	15.53 1.44

PRESSURE DROP

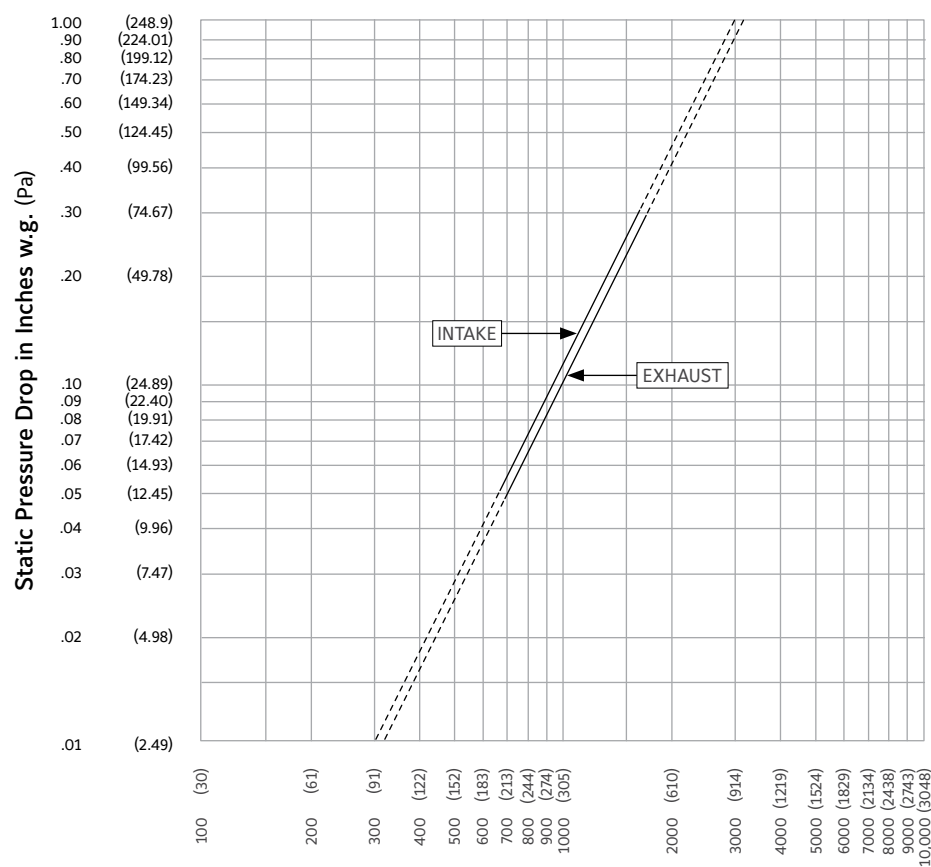

Air Velocity in feet (meters) per minute through Free Area
Pressure Drop testing performed on 48" x 48" (1219 x 1219) unit.
Ratings do not include the effect of a bird screen.

PERFORMANCE DATA



Ruskin certifies that the EME3625DFLMD shown herein is approved to bear the AMCA Listing Label. The ratings shown are based on tests and procedures performed in accordance with AMCA Publications and comply with the requirements of the AMCA Listing Label Program.

The AMCA Listing Label applies to Impact Resistant Basic Protection and High Velocity Rain Resistant Louver.

WIND-DRIVEN RAIN PERFORMANCE

Test size is: 39" x 39" (.99 x .99) core area, 41" x 41" (1.04 x 1.04) nominal. Free Area of test louver is 5.18 ft.² (.48m²).

Wind Velocity mph (kph)	Rainfall Rate in./hr. (mm/hr.)	Core Velocity FPM (m/s ¹)	Airflow cfm (m ³ /min)	Free Area Velocity ₂ fpm (m/sec.)	Effectiveness Ratio	Class _{3, 4}	Discharge Loss Class ₅ Intake
29 (46.4)	3 (76)	967 (5)	10,412 (294)	2,010 (10.0)	100%	A	1
50 (80.5)	8 (203)	974 (5)	10,484 (296)	2,024 (10.1)	100%	A	1

NOTES:

1. Core area is the open area of the louver face (face area less louver frames). Core Velocity is the airflow velocity through the Core Area of the louver. 5 m/s is the maximum core velocity utilized in this test.

2. Free Area of test size is calculated per AMCA standard 500-L.

3. Wind-Driven Rain Penetration Classes:

Class	Effectiveness
A	1 to .99
B	0.989 to 0.95
C	0.949 to 0.80
D	Below 0.8

4. The EME3625DFLMD provides class A performance at all velocities up to and including 5 m/s core velocity.

5. Discharge Loss Coefficient is calculated by dividing a louvers' actual airflow rate vs. a theoretical airflow for the opening. It provides an indication of the louvers' airflow characteristics.

Discharge Loss Classes:

Class	Discharge Loss Coefficient
1	0.4 and above
2	0.3 to 0.399
3	0.2 to 0.299
4	0.199 and below

(The higher the coefficient, the less resistance to airflow.)



Ruskin Company certifies that EME3625DFLMD louver shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Ratings Seal applies to air performance ratings and wind driven rain ratings only.

SUGGESTED SPECIFICATION

Furnish and install louvers as hereinafter specified where shown on plans or as described in schedules. Louvers shall possess stationary vertical blades designed to prevent the penetration of winddriven rain. Louver blades shall be contained within a 3" (76) frame. Louver components (heads, jambs, sill and blades) shall be factory assembled by the louver manufacturer. Louver sizes too large for shipping shall be built up by the contractor from factory assembled louver sections to provide overall sizes required. Louver design shall limit single section sizes to 48" x 96" (1219 x 2438) and shall withstand a wind load of 80 lbs per sq. ft. (3.83 kPa) (specifier may substitute any loading required).

Louvers shall be Ruskin Model EME3625DFLMD extruded 6063T6 aluminum alloy construction as follows:

Frame: .073" (1.9) wall thickness, caulking surfaces provided.

Blades: .040" (1) wall thickness, installed vertically on approximately .75" (19) centers.

Screen: .050" x .063" (13 x 1.6) square mesh aluminum bird screen in removable frame.

Finish: Select finish specification from Ruskin Finishes Brochure.

LINKS TO IMPORTANT DOCUMENTS

Document Title

Paint Finishes and Color Guide

Limited Warranty Document



3900 Doctor Greaves Road
Grandview, MO 64030
Website: www.ruskin.com
Phone: (816) 761-7476