

ELC6375DAF DRAINABLE COMBINATION LOUVER EXTRUDED ALUMINUM

STANDARD CONSTRUCTION

FRAME

6" (152) deep, 6063T5 extruded aluminum with .125" (3.2) nominal wall thickness. Downspouts and caulking surfaces provided.

BLADES

Front stationary drainable blades – 6063T5 extruded aluminum with .081" (2.1) nominal wall thickness, positioned at 37½° angle and spaced approximately 4½" (114) center to center.

Rear adjustable blades – 6063T5 extruded aluminum, .140" (3.6) nominal wall thickness for operating section widths through 60" (1524) .

SCREEN

¾" x .051" (19 x 1.3) expanded, flattened aluminum bird screen in removable frame. Screen adds approximately ½" (13) to louver depth.

SEALS

Extruded vinyl blade edge seals on rear adjustable blades and flexible, compressible aluminum jamb seals.

LINKAGE

Concealed in frame.

BEARINGS

Stainless steel sleeve pressed into frame.

AXLES

½" (13) plated steel hex.

ACTUATOR

Locking louver quadrant.

FINISH

Mill.

MINIMUM SIZE

12"w x 12"h (305 x 305).

APPROXIMATE SHIPPING WEIGHT



8 lbs. per sq. ft. (39.1 kg per m²).

MAXIMUM FACTORY ASSEMBLY SIZE

Shall be 120"w x 96"h (3048 x 2438) with standard frame. 120" x 93" (3048 x 2362) with integral flange frame. Maximum operating section width is 60" (1524).

Louvers larger than the maximum factory assembly size will require field assembly of smaller sections.

Dimensions in inches, parenthesis () indicate millimeters.

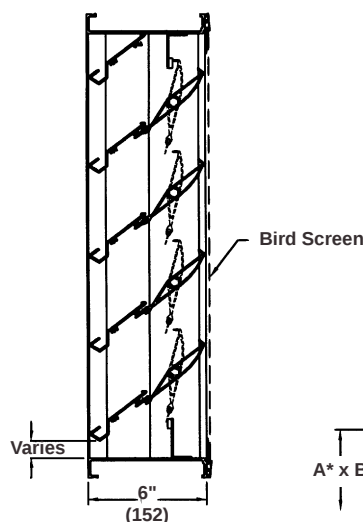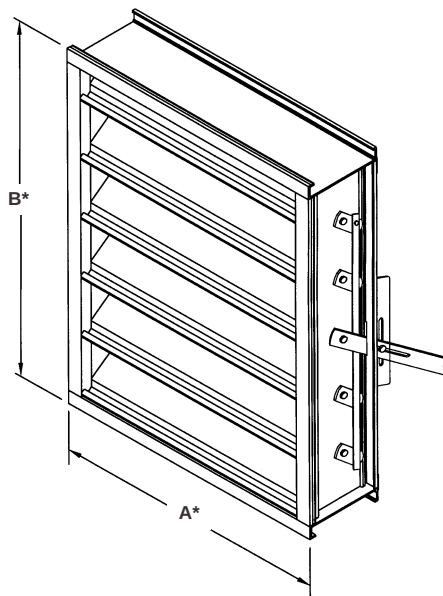

FEATURES

The ELC6375DAF offers:

- Published performance ratings based on testing in accordance with AMCA Publication 511.
- High free area, low water penetration, and low pressure drop.
- Concealed blade linkage is protected from weather exposure and reduces required installation depth.
- Adjustable rear blades provide desired shut off in the same 6" (152) deep frame normally required by a louver alone.
- Blade and jamb seals provide tight closure.
- A drain gutter in each front stationary blade and downspouts in jambs and mullions drain water from the louver with minimum water cascade from blade to blade.
- Architecturally styled hidden mullions allowing continuous line appearance up to 120" (3048).


VARIATIONS

Variations to the basic design of the louver are available at additional cost. They include:

- Extended sill.
- Electric or pneumatic actuators.
- Front or rear security bars.
- Filter racks.
- A variety of bird and insect screens.
- Selection of finishes: prime coat, baked enamel (modified fluoropolymer), epoxy, Acrodize, Kynar, clear and color anodize. (Some variation in anodize color consistency is possible).

Consult Ruskin for other special requirements.

FRAME CONSTRUCTION

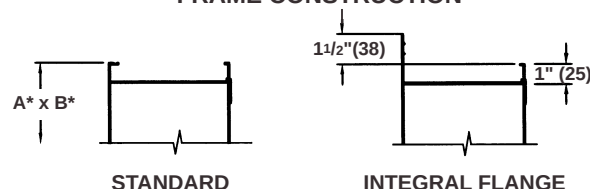

*Units furnished ¼" (6) smaller than given opening dimensions.

TAG	QTY.	SIZE		FRAME	VARIATIONS
		A*-WIDE	B*-HIGH		
PROJECT ARCH./ENGR. REPRESENTATIVE			LOCATION CONTRACTOR DATE		

PERFORMANCE DATA


AMCA Standard 500 provides a reasonable basis for testing and rating louvers. Testing to AMCA 500 is performed under a certain set of laboratory conditions. This does not guarantee that other conditions will not occur in the actual environment where louvers must operate.

The louver system should be designed with a reasonable safety factor for louver performance. To ensure protection from water carry-over, design with a performance level somewhat below maximum desired pressure drop and .01 oz./sq. ft. of water penetration.

WATER PENETRATION

Test size 48" wide x 48" high (1219 x 1219)


Beginning point of water penetration at .01 oz./sq. ft. is 1033 fpm (297 m/min).

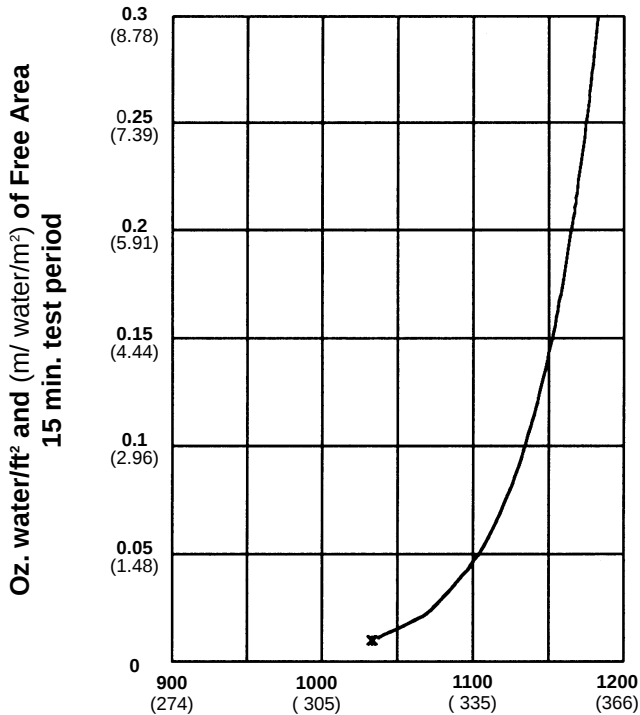

Ruskin Manufacturing Company certifies that the ELC6375DAF louvers shown herein are licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Ratings Seal applies to air performance rating and water penetration ratings only.

Free Area Velocity in feet and (meters) per minute
Standard air .075 lb/ft³

PRESSURE DROP

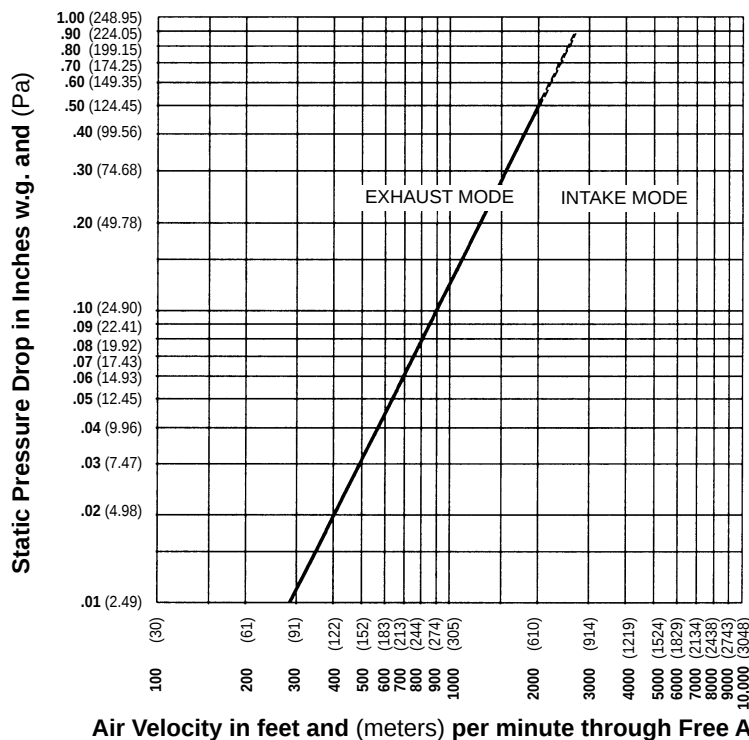

Ratings do not include the effect of a bird screen.


FREE AREA GUIDE

Free Area Guide shows free area in ft² and m² for various sizes of ELC6375DAF.

Width – Inches and Meters


Height – Inches and Meters		12	18	24	30	36	42	48	54	60	66	72	78	84	90	96	102	108	114	120
		0.30	0.46	0.61	0.76	0.91	1.07	1.22	1.37	1.52	1.68	1.83	1.98	2.13	2.29	2.44	2.59	2.74	2.90	3.05
	12	0.19	0.32	0.45	0.58	0.70	0.83	0.96	1.09	1.21	1.28	1.41	1.53	1.66	1.79	1.92	2.04	2.17	2.30	2.43
	0.30	0.02	0.03	0.04	0.05	0.07	0.08	0.09	0.10	0.11	0.12	0.13	0.14	0.15	0.17	0.18	0.19	0.20	0.21	0.23
	18	0.36	0.59	0.83	1.06	1.30	1.53	1.77	2.01	2.24	2.36	2.59	2.83	3.06	3.30	3.54	3.77	4.01	4.24	4.48
	0.46	0.03	0.05	0.08	0.10	0.12	0.14	0.16	0.19	0.21	0.22	0.24	0.26	0.28	0.31	0.33	0.35	0.37	0.39	0.42
	24	0.52	0.86	1.21	1.55	1.89	2.24	2.58	2.92	3.27	3.44	3.78	4.12	4.47	4.81	5.15	5.50	5.84	6.18	6.53
	0.61	0.05	0.08	0.11	0.14	0.18	0.21	0.24	0.27	0.30	0.32	0.35	0.38	0.42	0.45	0.48	0.51	0.54	0.57	0.61
	30	0.85	1.41	1.97	2.53	3.08	3.64	4.20	4.76	5.32	5.60	6.16	6.71	7.27	7.83	8.39	8.95	9.51	10.07	10.62
	0.76	0.08	0.13	0.18	0.24	0.29	0.34	0.39	0.44	0.49	0.52	0.57	0.62	0.68	0.73	0.78	0.83	0.88	0.94	0.99
	36	1.01	1.68	2.35	3.01	3.68	4.35	5.01	5.68	6.34	6.68	7.34	8.01	8.68	9.34	10.01	10.68	11.34	12.01	12.67
	0.91	0.09	0.16	0.22	0.28	0.34	0.40	0.47	0.53	0.59	0.62	0.68	0.74	0.81	0.87	0.93	0.99	1.05	1.12	1.18
	42	1.18	1.95	2.73	3.50	4.27	5.05	5.82	6.60	7.37	7.76	8.53	9.31	10.08	10.85	11.63	12.40	13.18	13.95	14.72
	1.07	0.11	0.18	0.25	0.33	0.40	0.47	0.54	0.61	0.68	0.72	0.79	0.87	0.94	1.01	1.08	1.15	1.22	1.30	1.37
	48	1.50	2.49	3.48	4.47	5.46	6.45	7.44	8.43	9.42	9.92	10.91	11.90	12.89	13.87	14.86	15.85	16.84	17.83	18.82
	1.22	0.14	0.23	0.32	0.42	0.51	0.60	0.69	0.78	0.88	0.92	1.01	1.11	1.20	1.29	1.38	1.47	1.56	1.66	1.75
	54	1.67	2.77	3.86	4.96	6.06	7.16	8.25	9.35	10.45	11.00	12.09	13.19	14.29	15.39	16.48	17.58	18.68	19.77	20.87
	1.37	0.16	0.26	0.36	0.46	0.56	0.67	0.77	0.87	0.97	1.02	1.12	1.23	1.33	1.43	1.53	1.63	1.74	1.84	1.94
	60	1.83	3.04	4.24	5.45	6.65	7.86	9.06	10.27	11.47	12.08	13.28	14.49	15.69	16.90	18.10	19.31	20.51	21.72	22.92
	1.52	0.17	0.28	0.39	0.51	0.62	0.73	0.84	0.95	1.07	1.12	1.23	1.35	1.46	1.57	1.68	1.79	1.91	2.02	2.13
	66	2.00	3.31	4.62	5.93	7.25	8.56	9.87	11.19	12.50	13.16	14.47	15.78	17.09	18.41	19.72	21.03	22.35	23.66	24.97
	1.68	0.19	0.31	0.43	0.55	0.67	0.80	0.92	1.04	1.16	1.22	1.34	1.47	1.59	1.71	1.83	1.95	2.08	2.20	2.32
	72	2.32	3.85	5.38	6.91	8.44	9.97	11.49	13.02	14.55	15.31	16.84	18.37	19.90	21.43	22.96	24.48	26.01	27.54	29.07
	1.83	0.22	0.36	0.50	0.64	0.78	0.93	1.07	1.21	1.35	1.42	1.56	1.71	1.85	1.99	2.13	2.27	2.42	2.56	2.70
	78	2.49	4.12	5.76	7.40	9.03	10.67	12.30	13.94	15.58	16.39	18.03	19.67	21.30	22.94	24.57	26.21	27.85	29.48	31.12
	1.98	0.23	0.38	0.54	0.69	0.84	0.99	1.14	1.30	1.45	1.52	1.68	1.83	1.98	2.13	2.28	2.44	2.59	2.74	2.89
	84	2.65	4.40	6.14	7.88	9.63	11.37	13.11	14.86	16.60	17.47	19.22	20.96	22.71	24.45	26.19	27.94	29.68	31.42	33.17
	2.13	0.25	0.41	0.57	0.73	0.89	1.06	1.00	1.38	1.54	1.62	1.79	1.95	2.11	2.27	2.43	2.60	2.76	2.92	3.08
	90	2.98	4.94	6.90	8.86	10.82	12.78	14.74	16.69	18.65	19.63	21.59	23.55	25.51	27.47	29.43	31.39	33.35	35.31	37.27
	2.29	0.28	0.46	0.64	0.82	1.01	1.19	1.37	1.55	1.73	1.82	2.01	2.19	2.37	2.55	2.73	2.92	3.10	3.28	3.46
96	3.14	5.21	7.28	9.34	11.41	13.48	15.55	17.61	19.68	20.71	22.78	24.85	26.91	28.98	31.05	33.12	35.18	37.25	39.32	
2.44	0.29	0.48	0.68	0.87	1.06	1.25	1.45	1.64	1.83	1.92	2.12	2.31	2.50	2.69	2.89	3.08	3.27	3.46	3.65	

AIR LEAKAGE

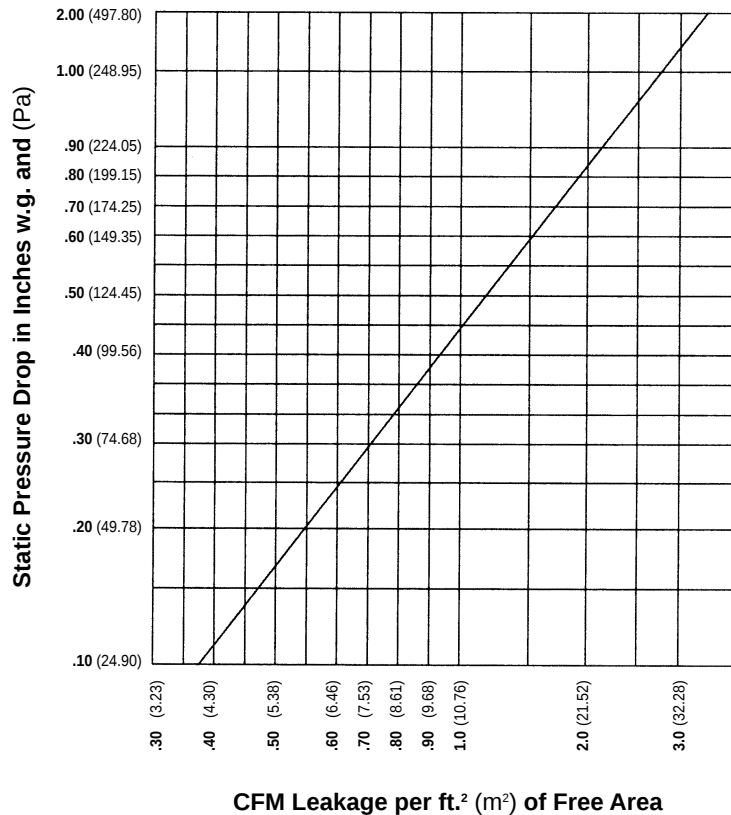


TYPICAL INSTALLATION DETAILS


**Masonry
Wall**

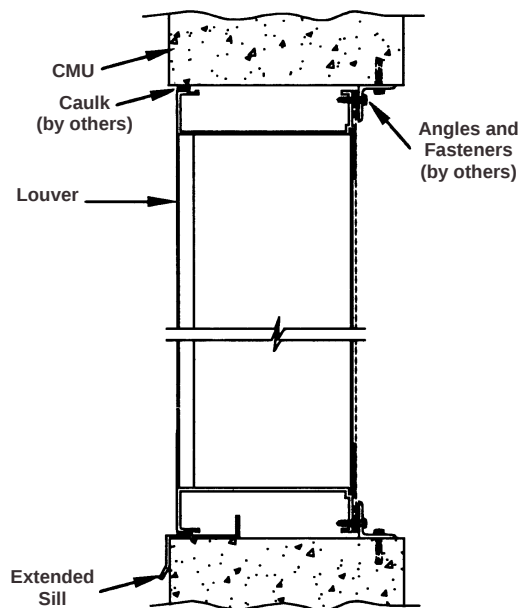


**Metal Panel
Wall**

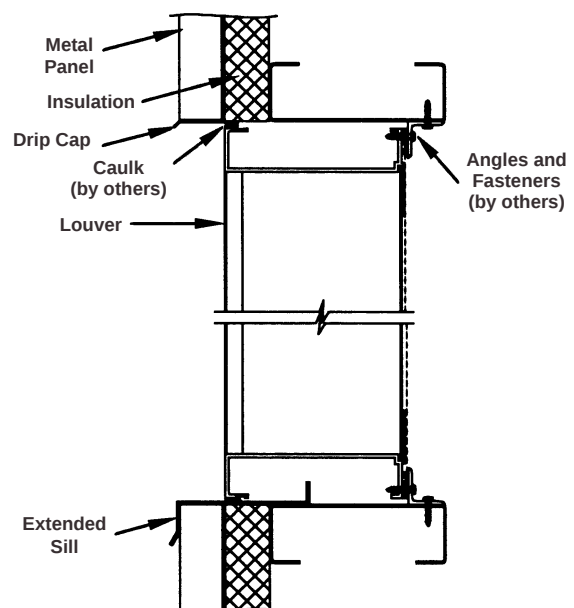

**Flange
Mount**

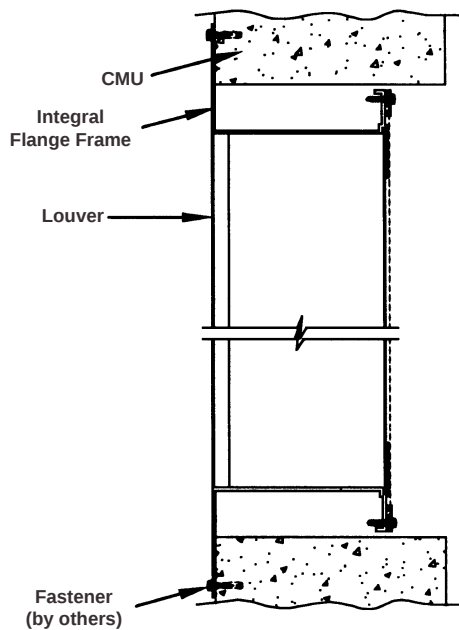

**Wood
Installation**

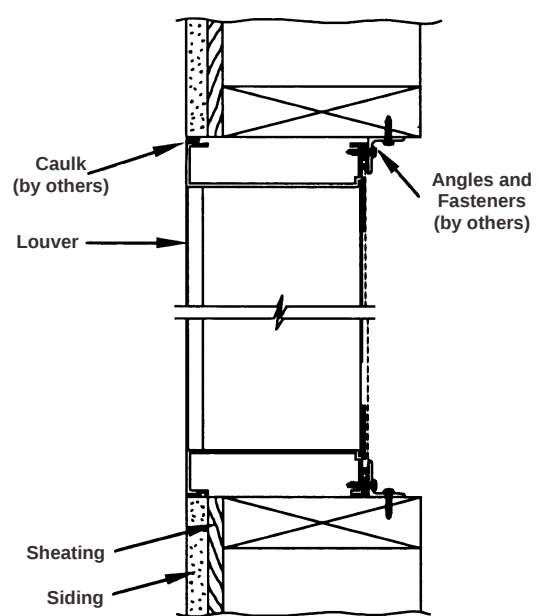

Accessories at additional cost.

RUSKIN®

3900 Dr. Greaves Rd.
Kansas City, MO 64030
(816) 761-7476
FAX (816) 765-8955